

Power

Extensive studies on the materials used and their dimensioning ensure that the **ROCCIA** plate rolls **can never be thrown into crisis**, even when they perform the toughest jobs. Increased structural sections, high driving torque and thrust of bending rolls and strong and efficient support of the machine yoke, these expedients guarantee a greater rigidity of the machine during cone rolling process.




Precision

All the steel parts required are produced on modern CNC machinery to ensure constant *within* tolerance results. Pivot points for the connection of the swing arm system, hydraulic cylinders, the yoke, utilize high static load bearings and (self-lubricating bushings), **being virtually maintenance free**. Encoders are attached to each end of the pinch side rolls, these encoders are used to individually monitor each pinch side rolls position and paralessism relative to the top roll. The encoders operate in unison with the machines PLC and electro-hydraulic valving. The PLC receives inputs from the encoders, recognising the actual position against a required position, the PLC sends a control voltage to the electro-hydraulic valve(s), the electro valving then is activated to adjust the hydraulic oil flow to the pinch side rolls to maintain or move to a desired DRO or CNC axis position.

Reliability

Reliability is achieved by attention to many details, such as:

- It is important to maintain a regulated hydraulic oil temperature, if the a hydraulic oil system overheats, it then reduces plate roll performance. **ROCCIA** plate rolls are fitted with an oil cooling heat exchanger, monitored by electronic indicators.
- Electronic indicators for low hydraulic oil level and filter failure due to excessive debris contamination [clogging].
- Every design calculation of a **ROCCIA** machine is generously increased by 20% to ensure that a **ROCCIA** plate roll-

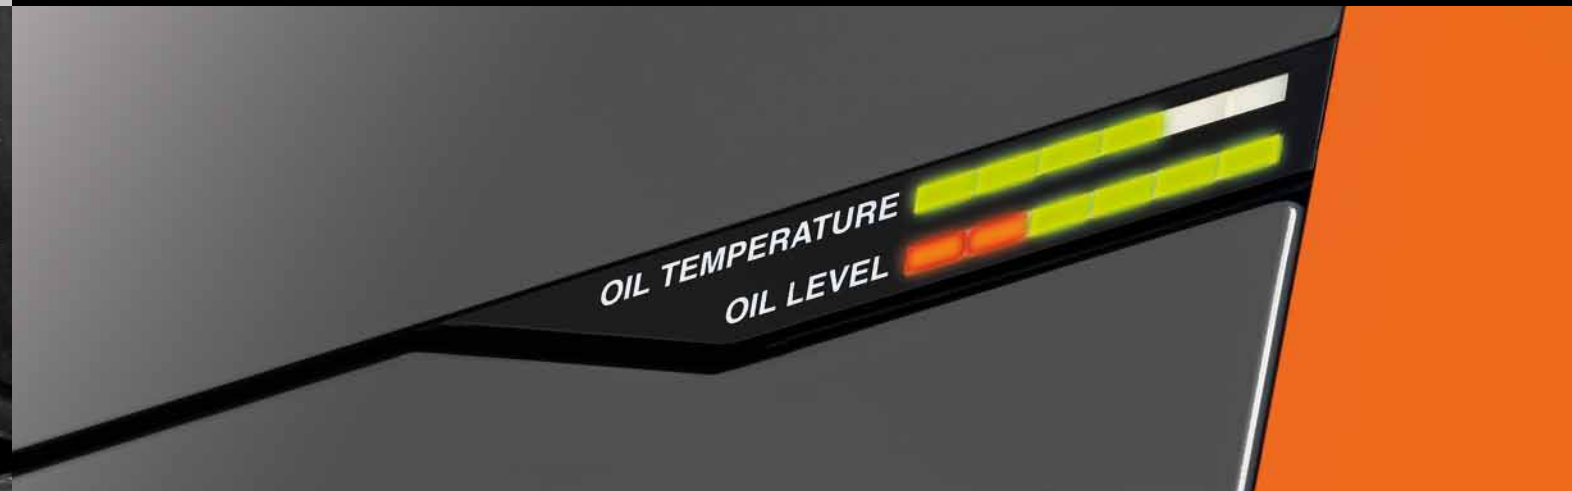

ing machine works below max capacity, but **has a capacity to withstand the occasional overload**.

- Thermal overlaid indicators protect the electrical circuits.

Why Roccia?

Experience does matter. At **ROCCIA** we have a group of experienced engineers designers and specialized build personnel, who combine together to obtain the best out of every single project.

- **Superior quality, reliability and performance**
- **Stock parts and after sales service support**
- **ROCCIA** is aware how important it is to resolve breakdown issues & quickly resume production. Thanks to our in house technicians, stock parts & worldwide dealer organization, we offer a responsive & quick feed back to minimise any machine down time.

Your choice to superior productivity & reliability, it has to be ROCCIA Rundbiegen.

Info and contacts:
ROCCIASRL.COM



| MACHINE MODEL | PLATE LENGTH | BENDING THICKNESS (5xTR) | PRE-BENDING THICKNESS (5xTR) | BENDING THICKNESS (1,1xTR) | PRE-BENDING THICKNESS (1,1xTR) | TOP ROLL DIAMETER |
|---------------|--------------|--------------------------|------------------------------|----------------------------|--------------------------------|-------------------|
| HR3W2006 | 2050 80,71" | 6 0,24" | 4 0,16" | 3,9 0,154" | 2,6 0,102" | 160 6,30" |
| HR3W2008 | 2050 80,71" | 8 0,31" | 6 0,24" | 5,2 0,205" | 3,9 0,154" | 190 7,48" |
| HR3W2010 | 2050 80,71" | 10 0,39" | 8 0,31" | 6,5 0,256" | 5,2 0,205" | 210 8,27" |
| HR3W2013 | 2050 80,71" | 13 0,51" | 10 0,39" | 8,45 0,333" | 6,5 0,256" | 230 9,06" |
| HR3W2018 | 2050 80,71" | 18 0,71" | 14 0,55" | 11,7 0,461" | 9,1 0,358" | 260 10,24" |
| HR3W2020 | 2050 80,71" | 20 0,79" | 16 0,63" | 13 0,512" | 10,4 0,409" | 270 10,63" |
| HR3W2025 | 2050 80,71" | 25 0,98" | 20 0,79" | 16,25 0,640" | 13 0,512" | 300 11,81" |
| HR3W2030 | 2050 80,71" | 30 1,18" | 25 0,98" | 19,5 0,768" | 16,25 0,640" | 330 12,99" |
| HR3W2040 | 2050 80,71" | 40 1,57" | 30 1,18" | 26 1,024" | 19,5 0,768" | 380 14,96" |
| HR3W2050 | 2050 80,71" | 50 1,97" | 40 1,57" | 32,5 1,280" | 26 1,024" | 430 16,93" |
| HR3W2080 | 2050 80,71" | 80 3,15" | 60 2,36" | 52 2,047" | 39 1,535" | 550 21,65" |
| HR3W2506 | 2600 102,36" | 6 0,24" | 4 0,16" | 3,9 0,154" | 2,6 0,102" | 190 7,48" |
| HR3W2508 | 2600 102,36" | 8 0,31" | 6 0,24" | 5,2 0,205" | 3,9 0,154" | 200 7,87" |
| HR3W2510 | 2600 102,36" | 10 0,39" | 8 0,31" | 6,5 0,256" | 5,2 0,205" | 210 8,27" |
| HR3W2513 | 2600 102,36" | 13 0,51" | 10 0,39" | 8,45 0,333" | 6,5 0,256" | 240 9,45" |
| HR3W2516 | 2600 102,36" | 16 0,63" | 13 0,51" | 10,4 0,409" | 8,45 0,333" | 260 10,24" |
| HR3W2522 | 2600 102,36" | 22 0,87" | 16 0,63" | 14,3 0,563" | 10,4 0,409" | 320 12,60" |
| HR3W2525 | 2600 102,36" | 25 0,98" | 20 0,79" | 16,25 0,640" | 13 0,512" | 330 12,99" |
| HR3W2530 | 2600 102,36" | 30 1,18" | 25 0,98" | 19,5 0,768" | 16,25 0,640" | 350 13,78" |
| HR3W2535 | 2600 102,36" | 35 1,38" | 30 1,18" | 22,75 0,896" | 19,5 0,768" | 370 14,57" |
| HR3W2540 | 2600 102,36" | 40 1,57" | 32 1,26" | 26 1,024" | 19,5 0,768" | 400 15,75" |
| HR3W2550 | 2600 102,36" | 50 1,97" | 40 1,57" | 32,5 1,280" | 26 1,024" | 450 17,72" |
| HR3W3006 | 3100 122,05" | 6 0,24" | 4 0,16" | 3,9 0,154" | 2,6 0,102" | 200 7,87" |
| HR3W3008 | 3100 122,05" | 8 0,31" | 6 0,24" | 5,2 0,205" | 3,9 0,154" | 220 8,66" |
| HR3W3010 | 3100 122,05" | 10 0,39" | 8 0,31" | 6,5 0,256" | 5,2 0,205" | 240 9,45" |
| HR3W3013 | 3100 122,05" | 13 0,51" | 10 0,39" | 8,45 0,333" | 6,5 0,256" | 280 11,02" |
| HR3W3016 | 3100 122,05" | 16 0,63" | 12 0,47" | 10,4 0,409" | 7,8 0,307" | 300 11,81" |
| HR3W3020 | 3100 122,05" | 20 0,79" | 16 0,63" | 13 0,512" | 10,4 0,409" | 340 13,39" |
| HR3W3025 | 3100 122,05" | 25 0,98" | 20 0,79" | 16,25 0,640" | 13 0,512" | 370 14,57" |
| HR3W3032 | 3100 122,05" | 32 1,26" | 25 0,98" | 20,8 0,819" | 16,25 0,640" | 400 15,75" |
| HR3W3040 | 3100 122,05" | 40 1,57" | 30 1,18" | 26 1,024" | 19,5 0,768" | 450 17,72" |
| HR3W3045 | 3100 122,05" | 45 1,77" | 35 1,38" | 29,25 1,152" | 22,75 0,896" | 480 18,90" |
| HR3W3050 | 3100 122,05" | 50 1,97" | 40 1,57" | 32,5 1,280" | 26 1,024" | 510 20,08" |
| HR3W3060 | 3100 122,05" | 60 2,36" | 50 1,97" | 39 1,535" | 32,5 1,280" | 600 23,62" |
| HR3W3070 | 3100 122,05" | 70 2,76" | 55 2,17" | 45,5 1,791" | 35,75 1,407" | 680 26,77" |
| HR3W3080 | 3100 122,05" | 80 3,15" | 60 2,36" | 52 2,047" | 39 1,535" | 750 29,53" |
| HR3W3090 | 3100 122,05" | 90 3,54" | 70 2,76" | 58,5 2,303" | 45,5 1,791" | 780 30,71" |
| HR3W30110 | 3100 122,05" | 110 4,33" | 80 3,15" | 71,5 2,815" | 52 2,047" | 820 32,28" |
| HR3W30125 | 3100 122,05" | 125 4,92" | 100 3,94" | 81,25 3,199" | 65 2,559" | 940 37,01" |
| HR3W30150 | 3100 122,05" | 150 5,91" | 120 4,72" | 97,5 3,839" | 78 3,071" | 1000 39,37" |
| HR3W4006 | 4100 161,42" | 6 0,24" | 4 0,16" | 3,9 0,154" | 2,6 0,102" | 240 9,45" |
| HR3W4008 | 4100 161,42" | 8 0,31" | 6 0,24" | 5,2 0,205" | 3,9 0,154" | 270 10,63" |
| HR3W4010 | 4100 161,42" | 10 0,39" | 8 0,31" | 6,5 0,256" | 5,2 0,205" | 320 12,60" |
| HR3W4012 | 4100 161,42" | 12 0,47" | 10 0,39" | 7,8 0,307" | 6,5 0,256" | 340 13,39" |
| HR3W4016 | 4100 161,42" | 16 0,63" | 14 0,55" | 10,4 0,409" | 9,1 0,358" | 380 14,96" |
| HR3W4020 | 4100 161,42" | 20 0,79" | 16 0,63" | 13 0,512" | 10,4 0,409" | 410 16,14" |
| HR3W4025 | 4100 161,42" | 25 0,98" | 20 0,79" | 16,25 0,640" | 13 0,512" | 460 18,11" |
| HR3W4032 | 4100 161,42" | 32 1,26" | 25 0,98" | 20,8 0,819" | 16,25 0,640" | 510 20,08" |
| HR3W4040 | 4100 161,42" | 40 1,57" | 32 1,26" | 26 1,024" | 20,8 0,819" | 580 22,83" |



Via dell'Artigianato n. 30 • 12040 **S. Albano Stura** CN • ITALY
Phone **+39 0172 474388** • Fax +39 0172 474324
info@rocciasrl.com • **www.rocciasrl.com**

dellaformavolta.com



PERFECTION
DOES NOT ALLOW FOR COMPROMISE





CONTACTEZ-NOUS - CONTACT US :
8860, boul. Guillaume-Couture
Lévis, Québec G6V 9H1
Garantmachinerie.com
info@garantmachinerie.com

CONSEILS PROFESSIONNELS
ÉQUIPEMENTS DE QUALITÉ
SERVICE RAPIDE





HR3WR 3 ROLL

Style

The **ROCCIA** plate rolls modern design lines subtly communicate that here is a high tech plate rolling machine that will deliver exactly what its specification states: a **high tech specification**, proven and reliable components, robustness of construction, ease of use, value for your money. From first sight the **ROCCIA** plate roll stands out from all other plate rolling machines, it is the outcome of a precision design, graphical analysis and 3D modeling, plus that all important ingredient, hands on plate rolling knowledge accumulated over many years.



Commitment

Striving to achieve perfection requires constant attention to many details, ongoing excellence in design technology, vigilance in the fabrication and machining procedures, use of proven and reliable components, a focused team of build technicians, a sales team **listening and interacting with customers**. At **ROCCIA** we are proud to say that we have this commitment to our product in abundance, it is what makes a **ROCCIA** plate rolling machine stand out from its competitors.



Technology

The wide **BASED ANGLED FRAME** bulkhead construction is designed to bring increased stability to the whole structure, designed by **ROCCIA** engineers to absorb side thrust forces during plate rolling cycles.

A **ROCCIA** 3 roll machine utilizes 3 driven rolls to ensure the rolling torque power transfer. Single unit high torque hydraulic **MOTORS/PLANETARY GEARBOXES** are directly mounted onto each driving roll to ensure a smooth feed through of the plate, there is no loss of power normally associated with secondary transmissions, plus the added benefit of one less gearbox to maintain.



ERGONOMIC CONTROL PANEL. As place your hands on the control console, you will immediately be aware that all the controls are exactly where you would expect them to be.

ROCCIA plate bending rolls **USE SWING ARM TECHNOLOGY** for the movement of the side bending rolls. Each swing arm is manufactured from a solid steel profile this ensures rigidity. This design solution offers a smooth friction free movement for each side roll, a friction less system has the advantages of; more pre bending power, a maintenance free longer life unit.



ROLL DESIGN CALCULATION. It is the *heart* of the machines performance; it's what makes a **ROCCIA** plate roll different from the competition.

ROLL CAMBER CALCULATION. Roll camber is required to counter act roll deflection that occurs as bending forces are applied, so as to ensure a perfect closing of the longitudinal seam, it is a vitally important factor. If the camber is calculated incorrectly, the result will be, (1) a barrel shaped cylinder ie not closing perfectly along the longitudinal seam, gap in the middle, (2) an hour glass shaped cylinder, the longitudinal seam touching in the middle, but not at the ends.

ROCCIA roll dimensioning camber calculation are done on sophisticated 3D cad software that produces all the critical data required for every step of the rolling process. Roll calculations are seldom to standard formulae, no, they are calculated around customer requirements, this being, material type, mechanical strength, material thickness, the rolls cylinder length dimension. Only this way can we grant the performance and the precision of the plate rolling machine we manufacture for you.

ROCCIA engineers have designed a new and exclusive heavy duty **CONE ROLLING DEVICE**, that is *mounted* or *bolted* or *positioned* into the machine hard against the bottom roll shoulder to eliminate possible movement.

The **MECHANICAL ADJUSTMENT OF THE PINCHING** lower roll [MAP] in conjunction with the powerful thrust of the 2 side bending rolls during the pre bend cycle ensures a minimal flat along the longitudinal edge.

CLEANLINESS AND ORDER in the hydraulic and electrical parts of our machine express the attention to detail we put into our product.

Smart machines

With the **OP.TIME** technology **ROCCIA** Rundbiegen plate rolls offer **up to 20% of energy saving**, when compared to traditional plate rolling machines. Our plate rolls use a **friction free swing arm**

POWERED BY
op.time

system to position the pre bend rolls, no friction, no power absorbed. When the machine is not in use for a period of 5 minutes an **electronic control sets the machine into a "stand by mode"**.

Ground floor

LIFTED BY
SURF-ON SYSTEM

SURF-ON SYSTEM is a new and revolutionary patent pending design. Thanks to it **ROCCIA** Rundbiegen machines with capacities up to 60mm material thickness **do not need a pit**. With our **SURF-ON SYSTEM** the machines ma-

terial loading height is around 1 meter which is considered to be the optimal height. It's a great advantage and a **money saving system**. Machine maintenance is made a lot easier.

CNC control



Three different software options for **three different levels of CNC control**. Written and then fully tested and optimized on our plate rolling machines, by

our **team of engineers**, always with our customers requirements to the forefront. The layout of every operation function window is clear and **user friendly**.

Balance

Each **ROCCIA** machine is the result of **balance** between high precision machining, controlled assembly procedures, customized hydraulic and electronic components, in order to obtain **robust and precise plate rolls**, manufactured without compromise.

-  **Mechanical Strength**
-  **Hydraulic Power**
-  **Electronic Precision**